

#### © Copyright Mac 2023

#### All Rights Reserved

No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission from State Planning Authority(SPA), Sarawak Government.





Prepared by ;

Legal, Research and Planning Information Section, PLANNING DIVISION

#### MINISTRY OF NATURAL RESOURCES AND URBAN DEVELOPMENT (MUDeNR)



## TABLE OF CONTENT

1.0	INTRODUCTION	1
2.0	CLASSIFICATION OF HERITAGE BUILDINGS (First Schedule, Sarawak Heritage Ordinance 2019)	2
	2.1 Heritage Shophouse Style	3
	2.2 Infill Development	4
	2.3 Example of Infill Development	5
	2.4 Facade Guidelines for Compatible Development within a Row of Heritage Buildings	6
3.0	GUIDELINES FOR INFILL DEVELOPMENT & RENOVATION WORKS ON CLASS II & III BUILDINGS	7
	3.1 Permitted Activities	7
	3.2 Facade	8
	3.3 Height	9
	3.4 Materials	10
	3.5 Corner Treatment	11
	3.6 Five-Foot-Way/Verandah	12
	3.7 Air well	13
	3.8 Back Lane 3.9 Paints	14 15
	3.10 Roof	16
	3.11 Air Conditioning	17
	3.12 Awning Or Canopy	18
	3.13 Facilities for Disabled Person	19
4.0	<b>GUIDELINES FOR SIGNAGE</b>	20
	4.1 Traditional Signage	21
	4.2 Signage Installation	22
	4.3 Shopfront & Residential Front (Front Facade)	23
	4.4 First Storey Column	24
	4.5 Spandrel Wall / Low Wall	25
	4.6 Upper Storey Facade	26
	<ul><li>4.7 Upper Storey Pilaster</li><li>4.8 Five Foot Way</li></ul>	27 28
	4.9 End Gable Wall	29
	4.10 Rear Wall	31
	4.11 Rooftop	31
5.0	<b>GUIDELINES FOR LIGHTING</b>	32
	5.1 Buildings	32
	5.2 Signage & Advertisement	32
6.0	PROCEDURE OF APPLICATION	33
	6.1 Procedure 1	33
	6.2 Procedure 2	34



#### 1.0 INTRODUCTION

This guideline and standard act as a guide for regulating development and redevelopment activities of Class II & III buildings within heritage and conservation areas in Sarawak for the protection of their setting. The fundamental principle of conservation applicable to all conserved buildings, irrespective of scale and complexity. The "3R"s:-

- Maximum RETENTION; i.
- Sensitive RESTORATION; and ii.
- Careful REPAIR iii.



#### 2.0 CLASSIFICATION OF HERITAGE BUILDINGS (First Schedule, Sarawak Heritage Ordinance 2019)

#### **CLASS I**

Historical buildings which are over 100 years old, have well documented history either public or private, and are declared as such before the date of coming into force of the ordinance amendment. This subsequent conservation and use of such building can only be approved by *Dewan Undangan* Negeri.

#### **CLASS II**

Historical buildings which are over 100 years old, have documented records, been in continuous use, either public or private, and are not declared as such on the date of this amendment. The conservation and use of such building shall be decided by Majlis Mesyuarat Kerajaan Negeri on the recommendation of the Sarawak Museum Department.

#### **CLASS III**

Historical Buildings which are less than 100 years old, have documented history and of great significance.

#### 2.1 Heritage Shophouse Styles





1900s - 1910s





Late Shophouse

Style

1920s - 1930s



1930s - 1960s









1900s - 1920s







Early Modern

Style

1960s - 1970s

and

Relatively low squat elevational proportion; Simple facade.

Physical Appearance:

1 - 2 storeys;

- One or two windows on the upper floor
- facade; and The windows are side-hung casements with single or double timber shutters features.

- 2-3 storeys; More emphasis on the vertical
- proportion; Windows and doors are usually timber-framed and shuttered;
- and Often two windows on the

# upper storeys.

## Physical Appearance:

- 2-3 storeys;
- Simple ornaments;
- Openings timber-framed and shattered;
- 2 to 3 windows on the upper
- floors; and Rectangular, semi-circles, segmental transom windows are used.

- 2-3 storeys; Tripartite
- arrangement of windows façade reduces the wall surface to a minimum;
- and Heavy ornamentation

on its facade.

and horizontal lines;

European

influence: Art-

Deco facade with

geometric design

- wall; and
- highlighting vertical
- Flagpole on the

Glass window.

### form and design

- 2-3 storeys;
- Simplification of based availability new materials structure
- and driven technological
- and engineering developments;
- Sunshade metal frame glass window.

of

by

fins,



Figure 1: Diagram of Infill Development


#### 2.2 Infill Development

Development or redevelopment of vacant land, land built with temporary structures or land with structurally unsound building within a row of existing building under Class II & III of the Heritage Ordinance. Demolition and redevelopment is permitted subject to the conservation guidelines. Reconstructed building should retain all its historical and architectural features.



#### 2.3 Example of Infill Development


The design of new building must be sympathetic to the surrounding buildings and the historic context, to complement the existing local character. Developments adjacent to historically significant value buildings, outside the heritage and conservation area will be determined and assess on case-to-case basis. The height of compatible development is dependent on the height of the lower adjacent heritage building. Sites without adjacent heritage building within the heritage area, may be built to a maximum of 18 meters from ground level to roof EAVE and it is subject to approval by Local Authority.

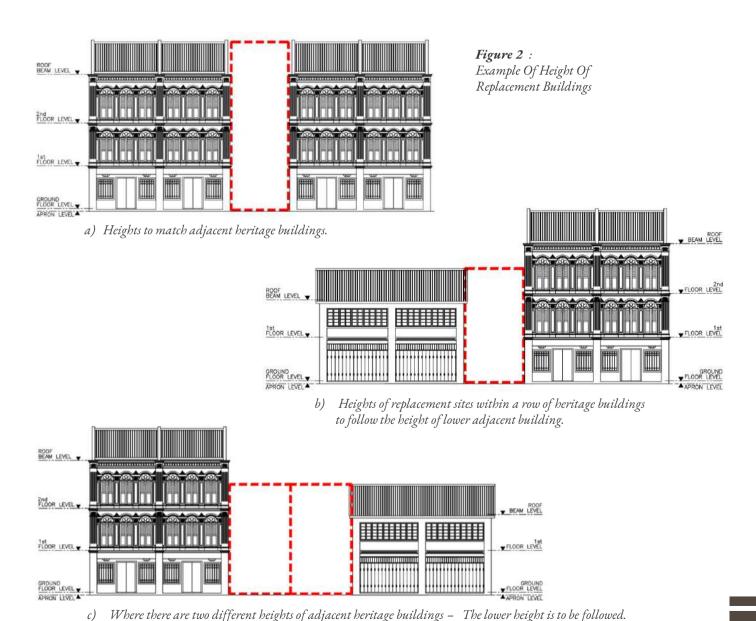

# 2.4 Facade Guidelines for Compatible Development within a Row of Heritage Buildings

The facade composition of compatible replacement development must respect the scale and rhythm of its surrounding buildings. Infill sites and replacement building within a row of heritage buildings are subject to these facade guidelines:

- i. The infill development must correspond to the number of bays of its neighboring building; or
- ii. The number of bays to correspond to the typical width of the bays of its neighboring buildings.

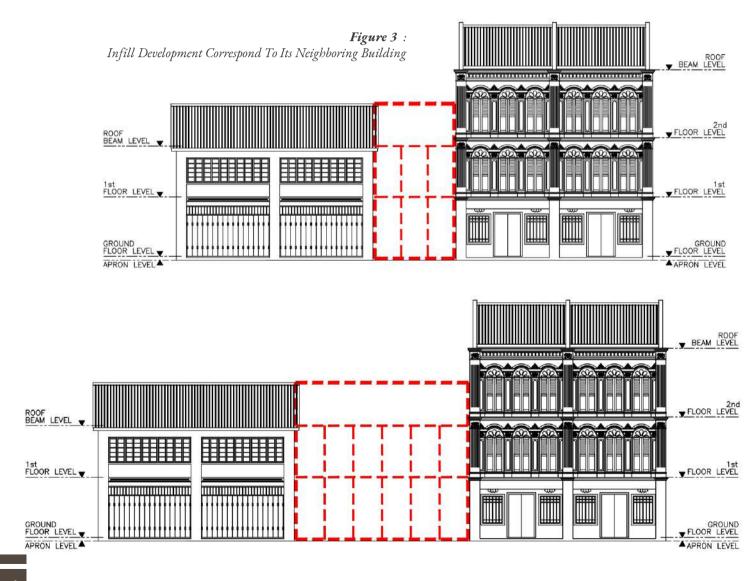



3.0 GUIDELINES FOR INFILL
DEVELOPMENT &
RENOVATION WORKS ON
CLASS II & III BUILDINGS

#### 3.1 Permitted Activities

All residential and commercial activities are allowed, EXCEPT for HEAVY INDUSTRY (coffee shop, budget hotel, eateries, florist shop, café and bistro, pharmacy, confectionary and bakery, home appliance supplier, souvenir shop, retail shop, travel shop, bookstore, reflexology, beauty shop, salon, convenience store, hardware shop, furniture shop, IT accessories store, laundry, travel agent, banking, goldsmith, textile shop, religious activities, coffin maker, 4-Digit gambling outlets). Existing licensed premises prior to this guideline can remain in the heritage and conservation area. Existing activities are required to adopt best environmental practice.




#### 3.2 Facade

- Where possible, all original elements on the facade are to be retained and/or restored and original materials should be used.
- Consistency of facade treatment shall be maintained in terms of height, parapet, floor or floor heights, verandahs, window, soffits and gables.



#### 3.3 Height

- The height of the building shall correspond or match the height of existing building/ structure.
- The design guide should make provision that will reflect the architectural theme of the area. Example: If majority of the buildings are of 2-storey in heights, the redevelopment shall be confined to 2-storey only.

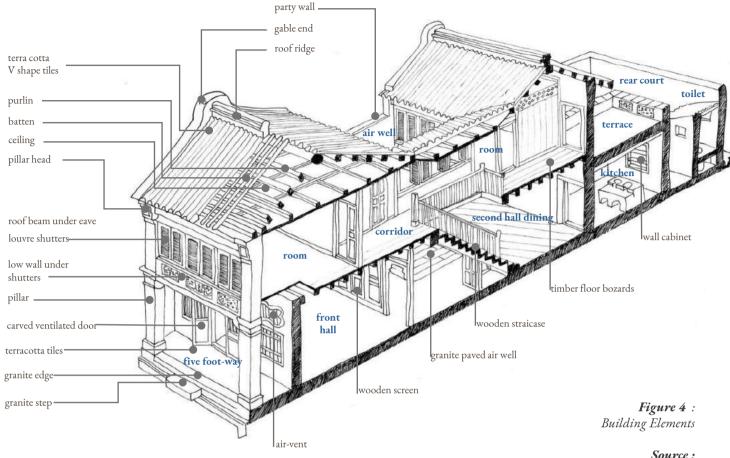

The Shophouse, Reshaping Colonial Built Heritage In A Contemporary Landscape, Karine Too, 2020

#### 3.4 Materials

- Original material shall be maintained and avoid the use of large quantities of unsympathetic/ foreign material (e.g metals, aluminum, tinted glass). If any, subject to approval by the Museum Department.
- Uniformity shall be maintained in the use of materials, for columns, floor/wall, ceiling, roofs, etc.
- Where available, replacement or rebuilding material shall use the 'original' material or material which can match the 'original'.







#### 3.5 Corner Treatment

- The treatment of elevation or corner buildings shall be maintained to the original.
- Where use has changed from the 'original' the new side elevation treatment shall be sympathetic to the front facade and shall be continuous in rhythm, scale and texture.

11




#### 3.6 Five-Foot-Way/Verandah

- The five-foot-way it is a recessed area below the first floor of a building that is designated as public space. The entrance to the building is recessed in by minimum five feet, thus creating for this passageway.
- It is also a culturally significant space, where prayer and thanksgivings are offered to protect the occupants of the buildings.
- Consistency of heights, widths and levels shall be maintained.
- Should not be blocked with fixed obstructions.





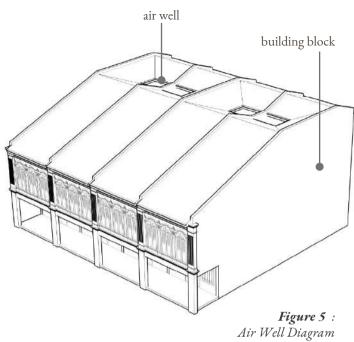

#### 3.7 Air well

Open air allows natural ventilation for both the kitchen and the toilet located in this area. When the houses are back-to-back, this air-well is important for healthy living.

The air well shall be maintained, but it is not required for cut-back buildings.

#### BACK LANE

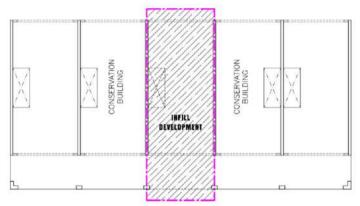


Figure 6: Back lane Diagram

#### 3.8 Back Lane

Back lane should be provided for infill development of Class II & III building.





#### 3.9 Paints

- Any types of paint can be used.
- To maintain the overall color scheme of the area.
- Different shades of the color may be accepted where deem appropriate by the Local Authority.
- Where traces of original colors are found, the original finishes, shall be retained & restored.

15



#### 3.10 Roof

- Where possible, the original traditional roofing material should be maintained (example : V or U profile, unglazed, natural color terracotta tiles. Timber battens run ridge to eaves on horizontal purlins (roof beams) - Shophouses, bungalows etc.).
- The original height and pitch of the roof shall be maintained.



#### 3.11 Air Conditioning

- Installation of the air conditioner shall be done in careful manner to minimize the damage to the buildings.
- Existing, unsightly installation of air conditioner should be relocated to a proper location which is less obtrusive.
- Air conditioning pipes and conduits on the external façade is not permitted.
- Air-condensing compressor unit(s) on front facade is not permitted.

#### 3.12 Awning Or Canopy

- Where possible, the awning/ canopy is to follow traditional form.
- Materials of timber frame & roofing like that of the main roof is encouraged while the use of modern rigid & colored awning/ canopies may be considered on a case-tocase basis.
- Traditional canopy corbels and timber structure on a neighboring building should be followed if appropriate.
- Original timber, shingles and tiled (terracotta tiles) canopy / awning to be retained and restored.

#### Awning Size:

- a. Protruding into road reserve maximum 0.6m
- b. Minimum height of 3m from the road level

#### Canopy Size

- a. Road reserve: Protrusion 1.2m (maximum)
- b. Pedestrian walkway: Protrusion 3m (maximum)





#### 3.13 Facilities for Disabled Person

- The design of the pedestrian walkways must be suitable for all especially the wheelchair user which are 1500mm minimum & 3000m maximum in width (in accordance Clause 4.2, MS 1331:2003)
- The design of the ramps should be well incorporated with the buildings and the surrounding settings. The maximum gradient for the ramp is 1:12 (Clause 7.2(a), MS 1331:2003 dan Clause 5.1(b), MS 1184:2002)
  - \*\*\*MS 1331:2003 Code of Practice for Access of Disabled Persons Outside Buildings (First Revision)

19

#### 4.0 GUIDELINES FOR SIGNAGE

**Building signage** is an integral and noticeable part of a building's architecture, as it may add interest and character to the building. Due to the special interest of heritage buildings:-

- i. Signages which may have a significant visual impact are not permitted for display on heritage buildings in the conservation area.
- ii. Signs are carefully positioned so that they do not obscure any key architectural or decorative features of the heritage building.







Example of Traditional Signage

#### 4.1 Traditional Signage

Traditional signs are not self illuminating, and the degree of embellishment varies considerably. Types of signages:-

#### Stonework

Incised stonework such as the figures of the year in which the building was completed or opened, the name of the building or that of its occupants, embossed lettering, emblems and logos, which is incorporated in the fabric of a building.

#### Molded Plaster

Letterings or characters formed in molded plaster relief on the outer face of columns, beams, friezes and pediments. They indicate the year of construction, company name or original building use.

#### Metal 3D Individual Letters

The Early Modern style of architecture saw the use of three-dimensional letters, often bronze, as part of the overall design on the façade. These were not internally illuminated.

#### Carved/ Painted Timber Panel

Carved timber panels with gold-painted Chinese characters sometimes combined with English translations.


#### **Contemporary Signs**

These are made usually of plastic with characters or words formed in contrasting colors, and can be lit from within their casings, i.e. self-illuminating. Some contemporary signs include painted metal panels and cloth banners to publicize events or promote.



#### Signage Installation

- All signage proposals within Conservation are to be submitted directly to the Local Authority.
- No advertising sign associated with the proposed development shall be erected without Local Authority prior approval.
- The installation of signages shall comply with the given standards.

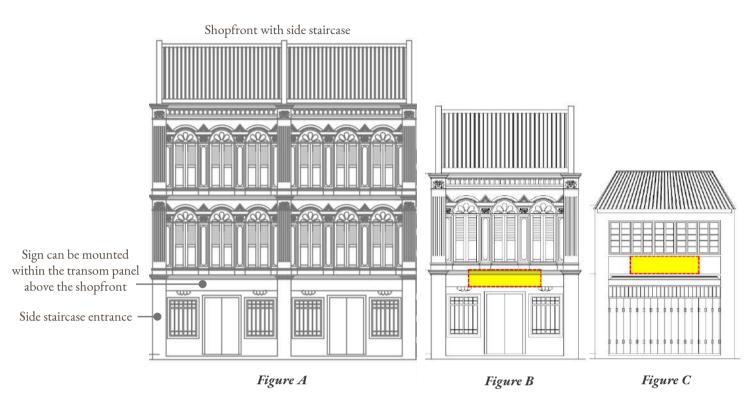

#### Shopfront & Residential Front (Front Façade)

- Signboard or name plaque can be mounted above the entrance door. The width (W) of the signboard or name plaque shall not be more than the width of the entrance door and its height (H) shall be half or less than the width of the entrance door (Figure A).
- For a shopfront (either full-width or with side staircase entrance), signs can be mounted within the transom panel (Figure B).
- Distinctive features of a traditional shopfront such as relief motifs, ornaments, vents, fanlights, relief carvings on timber doors or windows and special finishes shall not be covered by the signage.
- Signboard or advertisement display shall not obscure or obstruct any window or ventilation opening on the wall of a building (Figure C).
- Placing of signboard or advertisement display on top of any decorative elements is not permitted.

23

#### 4.4 First Storey Column

- Signs can be projected from a column or mounted on the surface of column (Figure A).
- For signs projected from a column, the following are applicable:-
  - They are located at the left-hand side of the building as viewed from the road.
  - They do not project more than 0.76 meter from the façade of the building. b.
  - They do not exceed the height of the column shaft. c.
  - д. They do not project beyond existing roadside drain at first storey.
  - The width is not more than 0.6 meter. e.
  - f. The underside of the sign is to have a minimum headroom clearance of 3.66 meters above the walkway level.
- For signs on the surface of column, individual letters or sign panel cannot be larger than the surface of the column and must follow the shape of the column.

- Sign can be projected from column at the left-hand side of the building as viewed from the road.
- Sign not to exceed the height of the column shaft.
- Width of sign not to project beyond the existing roadside drain at the first storey and not be more than 600mm.
- Underside of sign to have a minimum headroom clearance of 2500mm above the walkway level.
- On surface of column. Individual letters on the column or sign panel not larger than the surface of the column. Sign to follow the shape of the column.

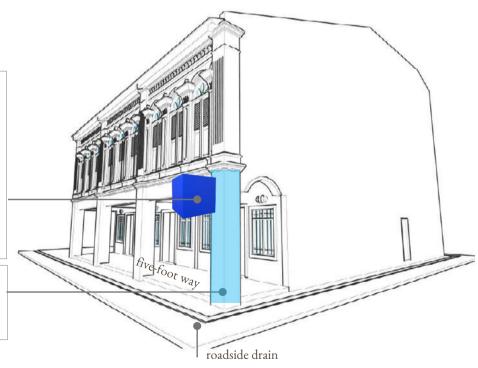


Figure 7: Signs Projected From A Column And Mounted On The Surface Of Column

#### 4.5 Spandrel Wall / Low Wall

- Horizontal signboard or advertisement display shall conform within the central section of the spandrel wall or low-wall of the first floor of the premise/unit (Figure 8);
- The height of signage panel is determined by height (H). Length of advertisement display is determined by width (W); and
- If sign panel or advertisement display cannot be displayed, it is permissible to be mounted or suspended below the floor beam provided there is a minimum clear height of 2.5 meters (Figure 9).
- Advertisement display shall not project beyond 0.5 meter from the building.
- Horizontal projected box type casing advertisement display is not permitted.

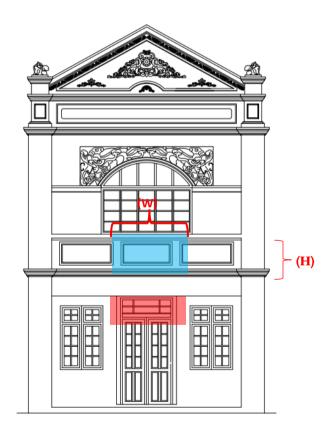


Figure 8 :
Permitted Positions Of Signage/
Advertisement On The Spandrel/Low Wall

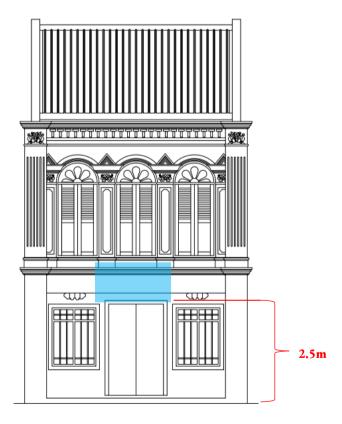


Figure 9:
Permitted Positions Of Signage/Advertisement Displays
For Shophouse Without Spandrel/Low Wall

#### 4.6 Upper Storey Façade

- Placing of horizontal signboard and advertisement display is prohibited above and beneath roof eave, with an exception of Individual letters or panel sign for a building of Art Deco or Early Modern style.
- Individual letters or panel sign for a building of Art Deco or Early Modern style shall be sensitively planned and designed and shall not cover or block any architectural features (Figure 10).

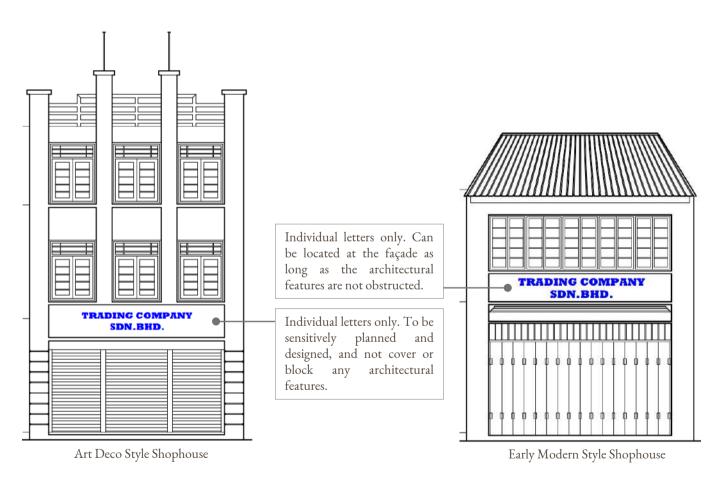


Figure 10 Individual Letters Or Panel Sign For A Building Of Art Deco Or Early Modern Style

#### 4.7 Upper Storey Pilaster

- Figure 11: Signboard projected from an upper storey pilaster.
- Signboard can be projected from an upper storey pilaster (Figure 11). It shall not project more than 0.76 meter from the façade of the building.
- They are to be located at the left-hand side of the building as viewed from the road.
- The overall height of the sign (inclusive of the suspension brackets) cannot exceed the shaft of the pilaster.
- The width of the sign is not more than 0.6m, and the width for bracket is not more than 0.2m.


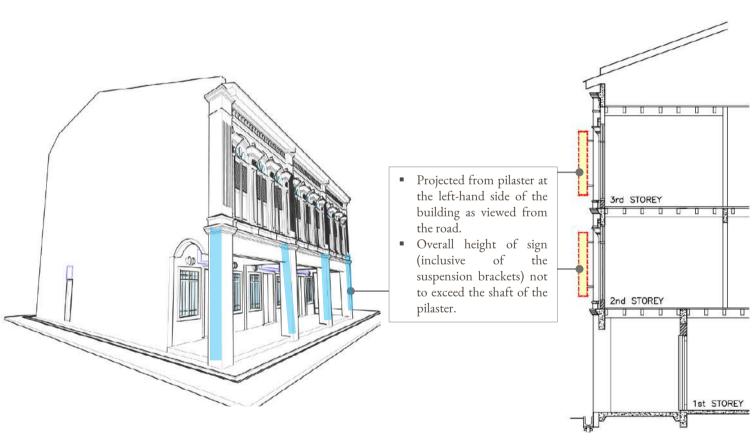


Figure 11 : Signboard Projected From An Upper Storey Pilaster

#### 4.8 Five Foot Way

- Hanging signs placed within the five-foot-way should be within the clear width between the column and entrance wall with minimum headroom clearance of 2.5 meters (Figure 12).
- Hanging signs placed above the arch of five-foot-way should not extend below the arch level; and
- Hanging sign placed below the arch must have minimum headroom clearance of 2.5 meters.
- Signage in the five-foot way should not cover the curve of the arch.

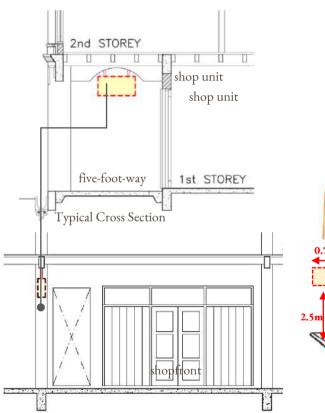

- Sign can be suspended within the clear with between column and party wall.
- Underside of sign to have minimum headroom clearance of 2500mm above the walkway level.


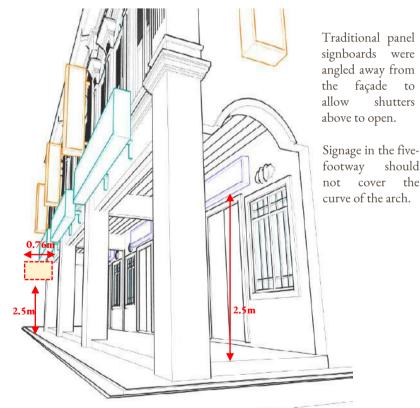



Figure 12: Individual Letters Or Panel Sign For A Building Of Art Deco Or Early Modern Style

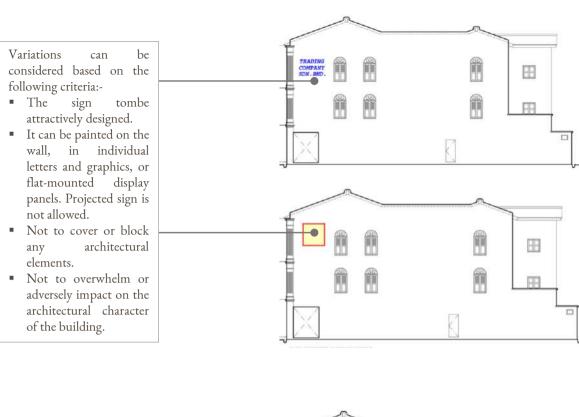

#### 4.9 End Gable Wall

- Sign can be mounted within the width of an entrance to a five-foot way and a door to the upper storey, where applicable.
- Variations in the size and location can be considered on merits of the case if they meet the following criteria:
  - a. The sign is attractively designed.
  - b. It comprises mural painting on the wall, individual letters and graphics, or flat-mounted display panels. Projected sign is not allowed.
  - c. The sign does not cover or block any architectural elements or features/ornaments.
  - d. It does not overwhelm or adversely impact on the architectural character of the building.
- Advertisement display, which protrudes above the roofline, is not permitted.
- Wall-mounted poster panels erected on the walls of a building is not permitted.



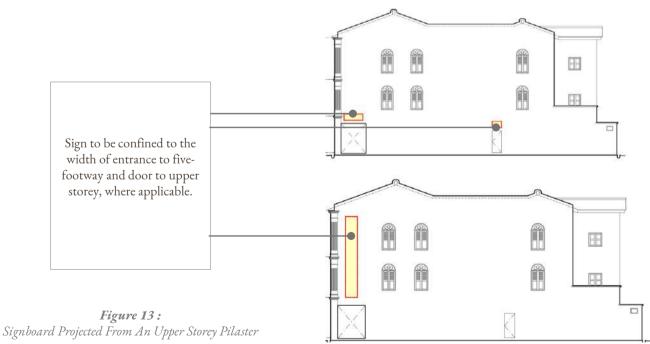

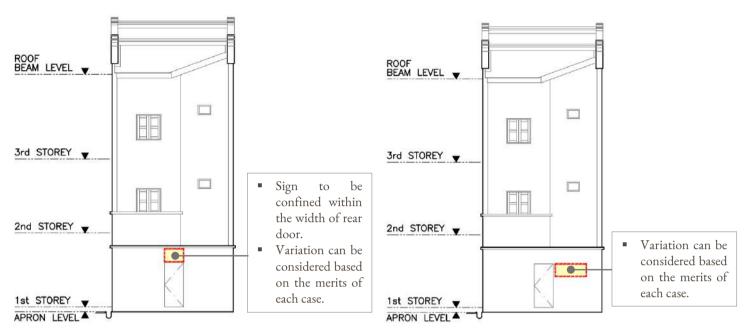


Figure 14: Location Of Signage At Rear Wall

#### 4.10 Rear Wall

• Signs can be mounted above a rear door and not to exceed the width of the door. Variations can be considered based on the merits of the case.

#### 4.11 Rooftop

Rooftop advertisement display is not permitted on all buildings within the conservation area.


#### 5.0 GUIDELINES FOR LIGHTING

#### 5.1 Buildings

- Illuminating heritage buildings must be carried out with extreme care, to avoid both ugly and damaging installations.
- Drilling of holes through walls in order to provide power supply, and the fixing of light fittings, all causes damage to the heritage buildings and should be kept to a minimum.

#### 5.2 Signage & Advertisement


- The lighting fixtures shall not be intrusive or obtrusive in nature to the whole building and shall be kept to the minimum.
- The arrangement of the spotlights does not obstruct the Façade.

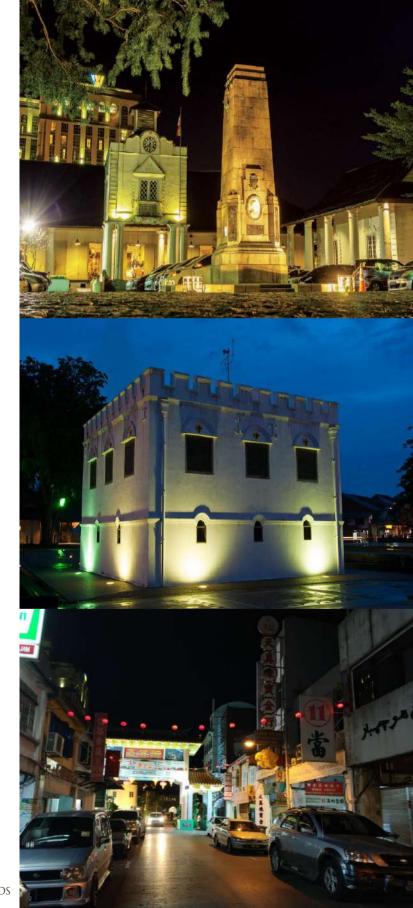

#### 6.0 PROCEDURE OF APPLICATION

There are 2 types of procedures that involve applications for development and redevelopment of Class II and II Heritage Buildings as follows:-

#### 6.1 Procedure 1

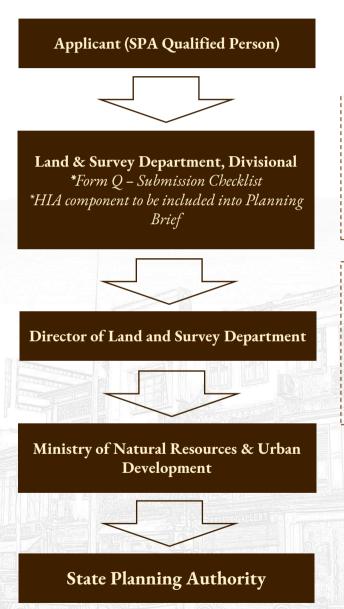

#### Type of Application:-

- i. Infill (New Development)
- ii. Physical Renovation/ Improvements Works (External)
  - a) Adding Additional Floor
- iii. Change of usage (eg: coffee shop to Inn, B&B, lodging require different permit/ license)

Additional Document Required **MUST** be obtained from:-

- i) Museum Department
- ii) DBKU
- iii) MBKS
- iv) BOMBA
- v) Structural Integrity Reports From Qualified Engineer

\* \* \* Notes:-

All application must be made through online submission at Electronic State Planning Authority System (eSPA System).

#### 6.2 Procedure 2

Applicant (SPA Qualified Person)



Local Authority (Example DBKU,MBKS & Others)

#### Type of Application:-

- i. Existing Building involved minor renovation, alteration of any kind e.g. reroofing, windows and doors replacement.
- ii. Installation/erection of signage
- iii. Painting
- iv. Mural
- v. Awning

Additional Document Required **MUST** be obtained from:-

- i) Museum Department
- ii) BOMBA
- iii) Structural Integrity Reports From Qualified Engineer



